





NEW

## Superwinch Tiger Shark

*New! Synthetic Version*



### Certified Dyneema Synthetic Rope

Superwinch relies only on certified Dyneema rope. You'll appreciate the extra expense.



### No brake in drum

To keep synthetic rope damaging heat at bay, Superwinch engineers moved the brake into the motor.



### High-end Hawse

CNC'd aluminum hawse is strong and better looking than cast versions.



# Superwinch Tiger Shark Series



Sealed Solenoid

Ergonomic freespool makes freespooling easy

3-Stage and 4-Stage Planetary Gearbox

Stainless Steel Rollers fight rust



# Superwinch Tiger Shark

*Upgraded Solenoid*



## **Weather Sealed Solenoid and Motor**

Ultra-reliable and reduces  
damage from rain and snow



## Ergonomic Pull and Turn

Remove the danger of unintended freespooling with the Superwinch pull and turn.



## Stainless Steel

Tiger Sharks feature luxury stainless steel hardware, fairlead rollers and tie bars to keep the elements at bay and your 'Shark looking great.




# Superwinch Tiger Shark

*Geared for battle*

## All Metal Gears

Steel cut gears handle torque on demand

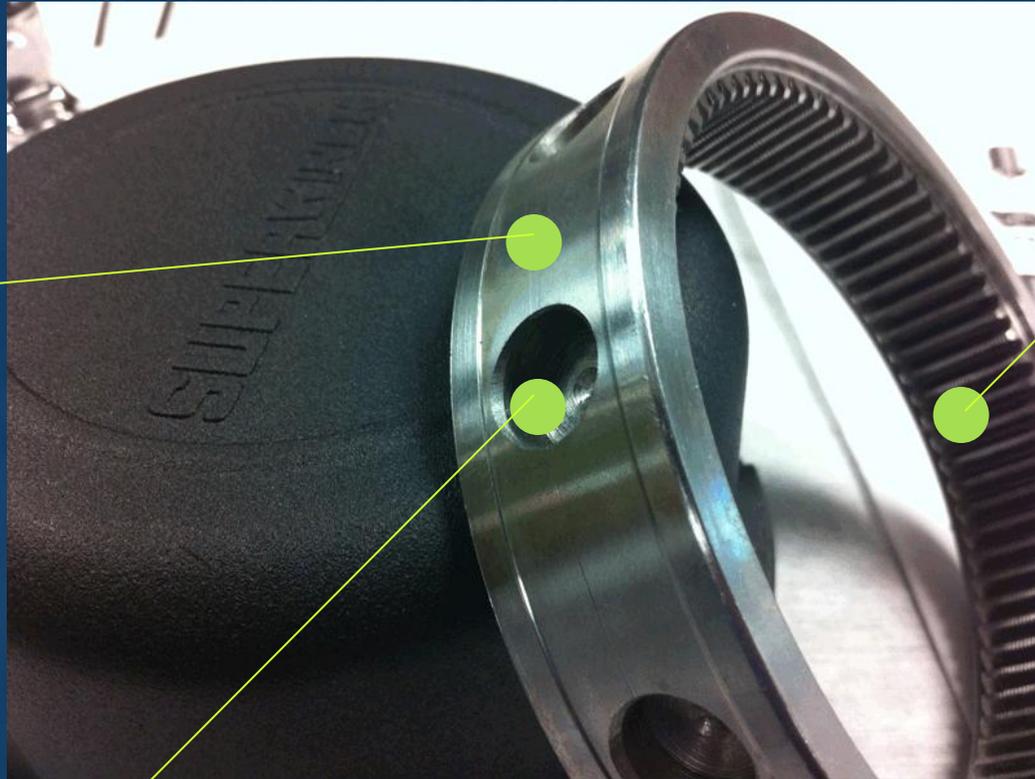

## Planetary Gearboxes

The Tiger Shark 9500 and 11500 feature 3-Stage Gearboxes while the Tiger Shark 13500, 15500 and 17500 feature massive 4-stage gearboxes.

## Easy Freespool

Superwinch engineers placed the freespool rotating gear specifically to make the Tiger Shark one of the easiest freespooling winches ever!



**Tiger Shark 9500**  
capacity: 9,500 lbs



**Tiger Shark 11,500**  
Capacity: 11,500 lbs



**Tiger Shark 13,500**  
capacity: 13,500 lbs



**Tiger Shark 15,500**  
Capacity: 15,500 lbs



**Tiger Shark 17,500**  
Capacity: 17,500 lbs

# Superwinch Tiger Shark Series



**Tiger Shark Specifications**

Model	9500	11500	13500	15500	17500	
Part Number	1595200	1511200	1513200	1515200	1517200	
Voltage	12 VDC	12 VDC	12 VDC	12 VDC	12 VDC	
Rated Pull lbs (kg)	9500 (4309)	11500 (5216)	13500 (6123.5)	15500 (7031)	17500 (7938)	
Motor hp (kW)	5.2 (3.8)	6.0 (4.48)	5.3 (3.95)	5.7 (4.25)	6.5 (4.84)	
Gearing	3-Stage Planetary		4-Stage Planetary			
Gear Ratio	218:1		518:1			
Solenoid	Weather Sealed					
Freespool	Ergonomic Pull and Turn					
Brake	Mechanical, Automatic, Load Holding					
Rope Length ' (m)	95 (28)	84 (26)	95 (29)	92 (28)	90 (27.4)	
Rope Dia " (mm)	21/64 (8.3)	3/8 (9.5)	13/32 (10.3)	29/64 (11.5)	1/2 (12.7)	
Hook	Heavy Duty/Clevis Pinned/Latched					
Fairlead/Hawse	Stainless Steel 4-way Roller Fairlead					
Remote Control	Rugged Rubberized Handheld					
Weight Installed lbs (kg)	90 (41)	94 (42)	134 (60.7)	140 (63.5)	150 (68)	
Weight Shipping lbs (kg)	94 (42)	98 (44)	138 (62.5)	144 (65)	154 (70)	
Warranty	Limited 2-Year Warranty / 1-Year Electrical					
UPC	022705003605	022705003612	022705003629	022705003636	022705003643	
Performance	9500	11500	13500	15500	17500	
No Load	Amps	80		120		
	Line Speed	19 (5.7)		11 (3.4)		
	FPM (MPM)					
At Load	Amps	340		440		
	Line Speed	4 (1.2)	2 (0.6)	4 (1.2)	3.5 (1)	2.8 (0.85)
	FPM (MPM)					





Large Cradle for 2" Receiver  
Easy on/off  
p/n 2050



Recovery Strap, 3"x8'  
23,500 lbs strength  
p/n 2531

# Superwinch Tiger Shark Series

## Featured Accessories



Superwinch line dampner  
p/n 2570



swing away pulley blocks  
20,000 p/n 7750A  
36,000 p/n 7755



Large Accessory Kit  
P/N 2224